

NEW




Techno Bond is deservedly the largest Cladding Factory in the middle east & Africa.

Our company has continued to invest in cutting edge technology, offering an outstanding performance, durability and costly wise products over time. Techno Bond adequaety meets with all the official standards and specific criteria, naturally making it one of the most leading competitors in the market today.

To merely ensure our ACP performs perfectly, We start by choosing Aluminium Alloy 3003 / 5005 offering a great mechanical property, weathering resistance and ease of proper maintenance.

What is Techno Bond ?

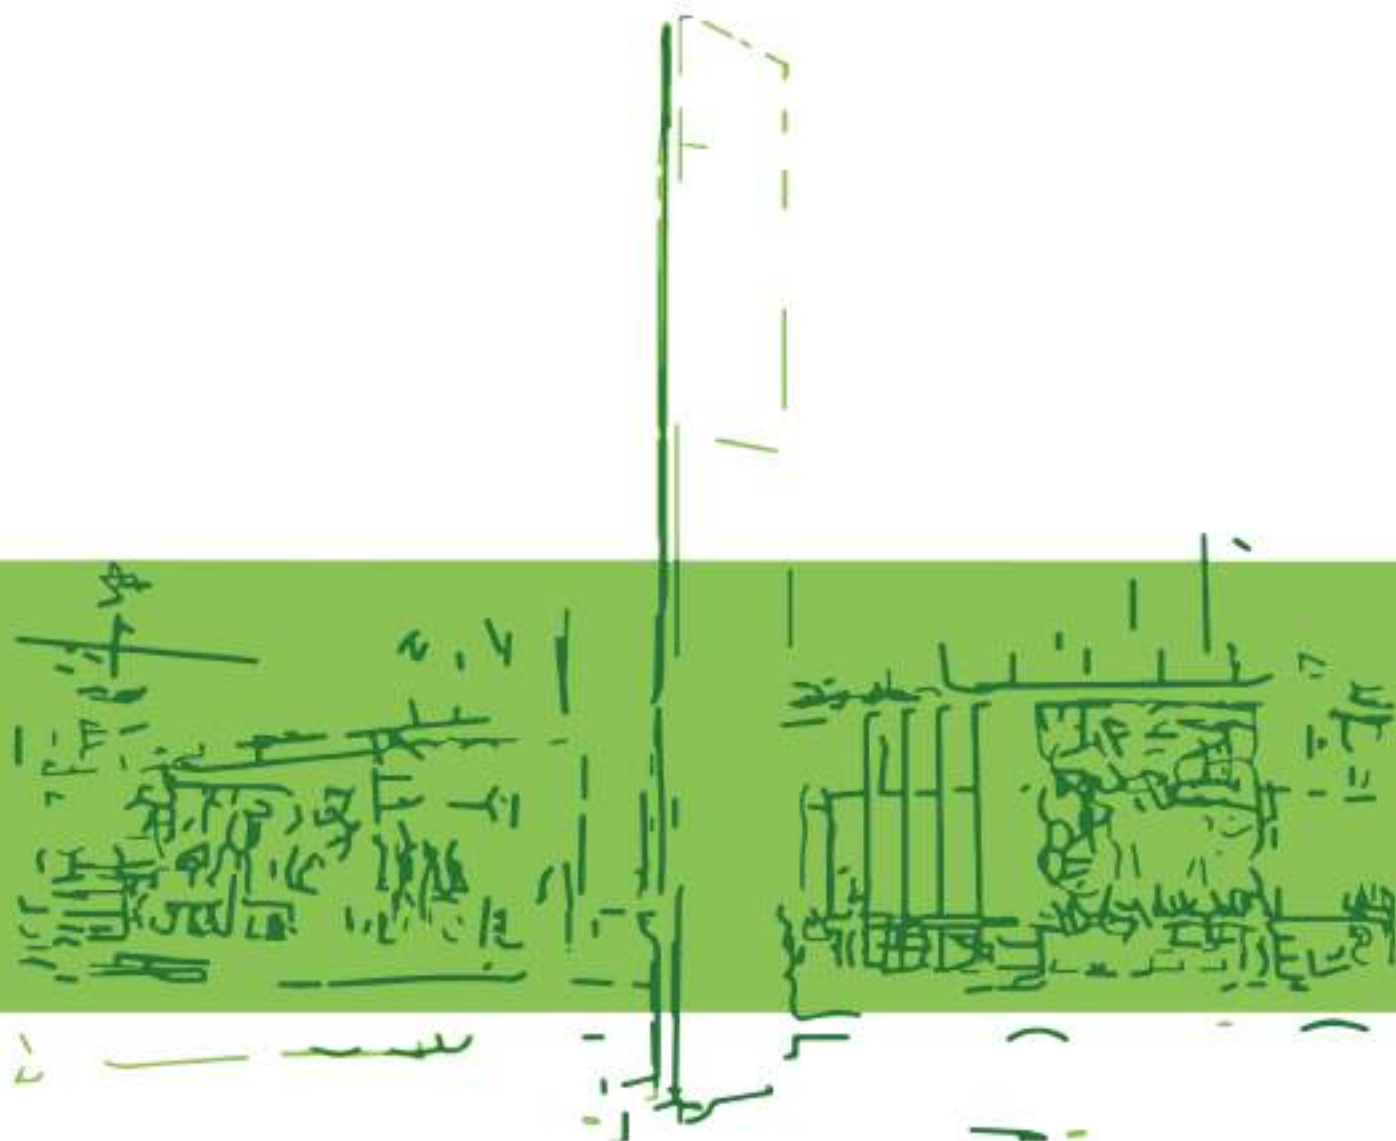



المواصفات الفنية لمنتج تكنوبوند المقاوم للحريق **A2**



**Talents Hand in Hand Build Techno Bond Family
Friends Heart to Heart to Creat Incomparable Glory**

مصنع ألواح الخليج تكنوبوند

أكبر مصنع لإنتاج ألواح الكلاينج في الشرق الأوسط وإفريقيا

Aluminium Composite Panels-Techno Bond



Techno Bond
Technical Data Sheet
FR A2

Technical Data Sheet

Techno Bond

FR - A2



Techno Bond Copyright 2022®

INDEX
Product Composition
Standard Composition
Product Performance Physical Properties
Physical Properties
Mechanical Properties
Bending Limit
Thermal Conductivity
Heat Transmission
U Value
Coating Finishes
Panel Core
Panel Strength
Joining Holes, I Bolts & Nuts
Product Warranty


PRODUCT COMPOSITION

Two sheets of Aluminum Alloy 3003 /5005 Series with 0.40 mm thickness on Top (Coated with PVDF Paint) & Bottom (Primer coated) are sandwiched with FR minerals as a core material formed in a continuous co-extrusion process with adhesives. The core material is free of voids and air spaces and does not contain foamed insulation materials.

Total Thick 4mm	Aluminum Thick	Kg/m2
FR-A2	0.4 mm	8.5 / kg
FR-A2	0.5 mm	9.2 / kg

Techno Bond FR A2

Composition

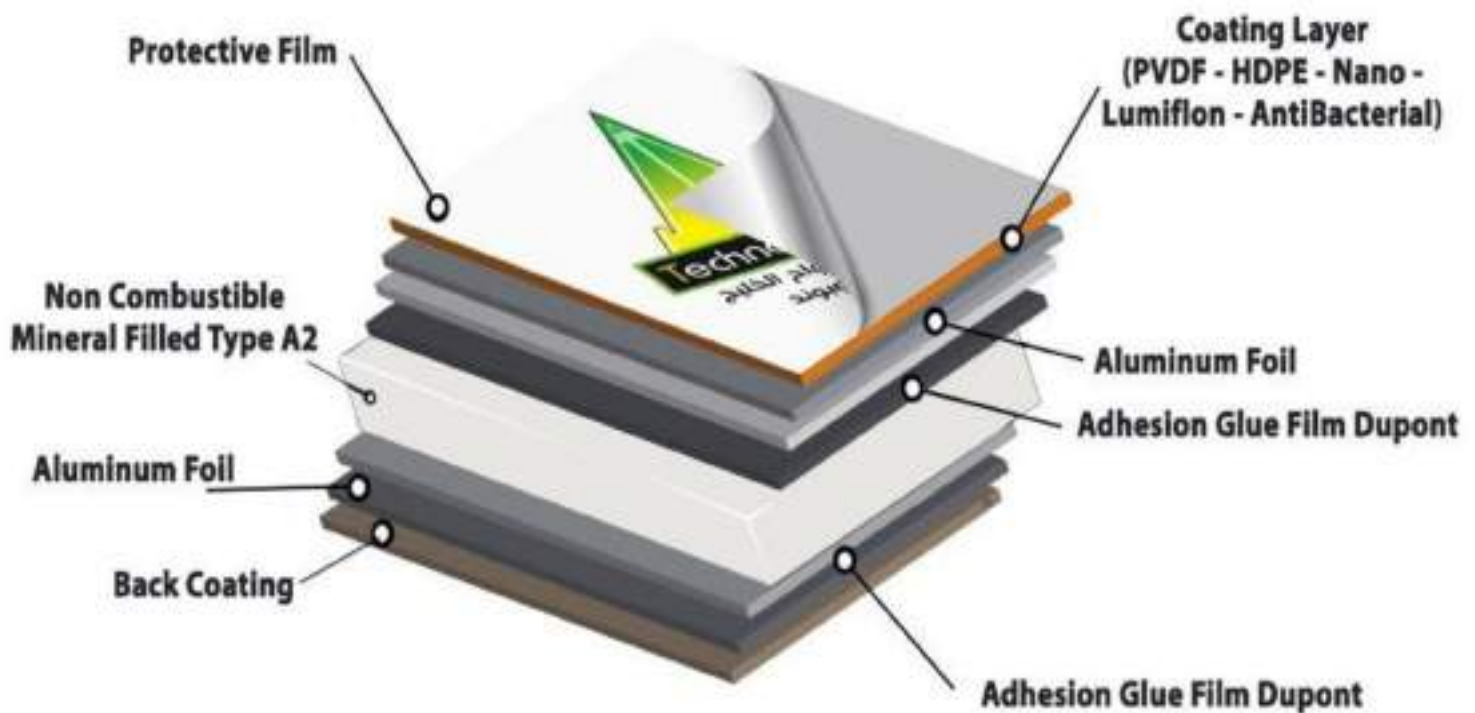

STANDARD COMPOSITION

Product	Total Panel Thick (mm)	Component Thickness(mm)			Aluminum Grade	Core Material
		Top Alum Skin	Core FR	Bottom Alum Skin		
Techno Bond FR A2	4	PVDF Coated 0.40mm 0.50 mm	3.0	Polyester Coated 0.40mm 0.50 mm	Alloy 3003/5005 series	Mineral filled Inorganic Noncombustible materials
	5		3.20			
	6		mm			

PRODUCT DIMENSION

Techno Bond FR A2 is available in various dimensions however; standard panel size is 4 mm X 1250 mm X 5800 mm other custom sizes can be produced upon request.

Dimension	Unit	Standard	Non Standard
Width	mm	1250	1000/1500/1575mm
Length	mm	5800	2440mm, 3660mm and 4200 mm Any length Available
Thickness	mm	4	4, 5 & 6

TOLERANCES

Dimensional /Standard Size (Rounded)

Thickness: + 0.20 mm

Width: + 2.0 mm

Length: + 2.0 mm Squareness: 5 mm maximum

PHYSICAL PROPERTIES

Name	Unit	Thickness	
		4mm	6mm
Density	g/cm ³	1.95	1.75
Weight	kg/m ²	8.5	10.50

COMPARISON WITH OTHER BUILDING MATERIALS

Physical Properties	Techno Bond FRA2	AL	FE	S. Steel	Concrete	Glass	Acrylic Sheet	Gypsum
Specific Gravity	1.75 -1.95	2.71	7.9	7.9	0	2.5	1.2	0.86
Thermal Conductivity W/m. K	0.44 -0.47	210	45	17	1.62	1	0	0.04

COMPARISON OF WEIGHT & RIGIDITY

FR A2 Specific gravity: 1.9			Aluminum Specific Gravity: 2.71			Stainless Steel Specific Gravity 7.89		
	Thick (mm)	Weight (Kg/m ²)	Thick (mm)	Weight (Kg/m ²)	Weight Ratio %	Thick (mm)	Weight (Kg)	Weight Ratio %
	4mm	8.5	3.3	8.5	62	2.4	18.9	29
Techno Bond FR A2	6mm	10.5	4.5	12.2	61	3.2	25.2	29

SELF & FLASH IGNITION TEMPERATURE

Techno Bond FR A2 is having self & flash ignition temperature of 550°C.

VIBRATION DAMPING

Techno Bond FR A2 has best vibration damping effect that absorbs mechanical energy arises out of vibration to convert it into thermal energy.

BENDING LIMIT

Techno Bond FR A2 can be bent in a Press Break or 3-roll bending machine. Normally the smallest radius that can be applied to bend the panel without wrinkles at the radial surface of panel is termed as the bend radius. In 3roll machine, the bending diameter depends on the roll diameter, length and type of machine.

Smallest bending radius (Parallel in Press Break Machine)

Thickness	Techno Bond FR A2
4mm	100mm
6mm	120mm

THERMAL CONDUCTIVITY

Compared to solid materials Techno Bond FR A2 has a lower thermal conductivity the table below .shows the thermal conductivity comparison of different materials.

MATERIAL	Thermal Conductivity (W/m K)
4 mm Techno Bond FR A2	0.45
Solid Aluminum	205
Steel	50.2
Polyurethane	0.02
Glass Wool	0.04
Brick	0.28
Concrete	0.80
Gypsum Board	0.13
Air at 0°C	0.024

U Value

Thermal Properties of Techno Bond®

U Value

Panel Thickness	Thermal Resistance $1/L \cdot R$ (m ² K/W)	Heat Transmittance Coefficient U value (W/m ² K)
3mm	0.0069	5.65
4mm	0.0103	5.54
6mm	0.0172	5.34

Thermal Conductivity (for Techno Bond) The Core is the determining Component

Core Material: $\lambda_{cp} = 0.29\text{W/mK}$

Aluminium $\lambda_{AL} = 200\text{W/mK}$

COATING FINISHES

Aluminum Coil Alloy (3003/5005 Series) coated with KYNAR® 500 based Polyvinylidene Fluoride PVDF utilizing with minimum 70% resin) Cooperate with (Becker's) French Coating).

PVDF Coating system offers two or three layer coating depending on color selection such as Metallic colors and Normal RAL Colors. Metallic Colors ore normally Two (2) coat system consisting Primer & Polyvinylidene fluoride color coat in conformance with the following general requirements of AAMA 620 .

Nano-PVDF Aluminium Composite Panel

TECHNO BOND Nano-PVDF aluminium composite panel is anti-graffiti and self-cleaning. It is composed of a core sandwiched between two 0.5mm aluminium skins. Coming with hydrophobic and lyophobic surface, the Nano-PVDF ACP features good water and dirt resistance. The protected object stays clean much longer and can be easily cleaned with pure water.

Techno Bond ACP has high water repellence and the dirt on its surface can be easily cleaned away by a heavy rain.

Benefits of TECHNO BOND Nano PVDF composite panel

TECHNO BOND nano-PVDF panel has the following advantages.

- Excellent easy-cleaning.
- Anti Bacterial surface
- Pollution Resistance
- Oil resistance
- Good Friction Resistance

Color

Generally, we are manufacturing Techno Bond FR A2 with various options of color coating. Basically we have two different types of colors such as Solid & Metallic finishes.

Custom color can be developed if required by Client / Consultant / Architect / Project Engineer.

PANEL CORE

Techno Bond FRA2 Mineral Filled Core A2 is a fire safe material passed mandatory requirements of relevant internationally acceptable standards and is best suitable for external and internal uses.

PANEL STRENGTH

Techno Bond FR A2 used for the external cladding must stand the wind load. This wind load will cause deflection of the panels and if the deflection is small, the panel will not deform.

The permanent deformation of the panel is calculated by 0.2% yield stress divided by the safety factor. In the calculation, we are assuming that the total strength of the panel is the strength of the Aluminum skins. If the calculated 2% proof stress is greater than the permissible, normally the panel is strengthened by giving additional stiffeners. The other factors affecting the strength of the panel are:

1. Panel thickness, width and length
2. Supporting conditions.
3. Wind load

We are using the Aluminum Alloy 3003/5005 series for Techno Bond FR A2, Aluminum skins 2% proof stress is 152 MPa and suitable where the wind speed is 50m/sec .

JOINING HOLES / BOLTS & NUTS

In the installation work, other important factors are the strength of the joining holes and the rivets. Normally the distance from the Hole center to the panel edge should be 2 times larger than hole diameter and to prevent the galvanic corrosion of the panels use only Aluminum or stainless steel rivets, Bolts nuts etc. if we are using dissimilar metals lay a coating to prevent the galvanic corrosion

RESISTANCE TO NATURAL FORCES

Lightning

If a lightning strikes, Techno Bond the electricity will be discharged to the earth through the substructure. Since the panel is connected to the earth through the sub structure.

STRENGTH OF SUBSTRUCTURE

The sub-structure where we are installing the panels should take the wind load and the panels. The strength of the substructure depends on the material and section of the structure, anchoring intervals of sub structure and wind pressure. The maximum deflection on the sub structure must be smaller than supporting intervals 0.5%

PRODUCT WARRANTY

Techno Bond FR A2 Aluminum Composite Panels manufactured by Alwah Al Khaleej Co. Will be warranted for a period of 20 Years from the date of supply, as per our standard product warranty policy. Formal Warranty documentation will be issued in the name of Orient and will be endorsed by the regional agents or the company itself.

CATEGORY	TEST STANDARD	TEST PROCEDURE	REQUIREMENT	ADM	ADM	RESULT
MECHANICAL TEST	CALIBRATED CALIPER	THICKNESS OF THE PANEL	±0.1	4.155mm	6.095mm	PASSED
	CALIBRATED WEIGHING DEVICE	WEIGHT OF THE PANEL	≥8.5 kg/m ² for 4mm ≥10.85 kg/m ² for 6mm	8.5Kg/m ²	11.1Kg/m ²	PASSED
	ASTM C273	Shear Strength	≥8.2 Mpa	3.75	3.99	PASSED
	ASTM01781	PEEL STRENGTH	>10 KG/25mm	20.6Kg/25mm		PASSED
	ASTM C 481 (CYCLE A)	WEATHERING RESISTANCE	A. SHEAR STRENGTH NO EFFECTS WHEN TEST AS PER ASTM C 273 B. FILM ADHESION NO EFFECTS WHEN TEST AS PER AAMA 2605(CLAUSE 4) C. IMPACT RESISTANCE NO EFFECTS WHEN TEST AS PER AAMA 2605(CLAUSE 7.5)	A. 375 MPA B. FILM ADHESION B1. DRY ADHESION-NO REMOVAL OF FILM WAS OBSERVED B2. WET ADHESION-NO REMOVAL OF FILM OBSERVED B3. BOILING WATER-NO REMOVAL OF FILM OBSERVED C. IMPACT RESISTANCE-NO REMOVAL OF FILM OBSERVED		PASSED
	ASTM D 648	TEMPERATURE FOR THE THERMAL DEFORMATION	≥100°C	183.9°C	205.5°C	PASSED
ASTM C 518	THERMAL CONDUCTIVITY	MEASURE VALUE	0.11W/mK	0.10W/mK	PASSED	
COATING PERFORMANCE	AAMA 2605	CORROSION RESISTANCE	A. HUMIDITY RESISTANCE NO FORMATION OF BLISTER TO EXTENT GREATER THAN "FEW" BLISTERSIZE # AS SHOWN IN FIG 4 OF ASTM D 714. B. SALT SPAY RESISTANCE: MINIMUM RATING OF 7 ON SCRIBES OR CUT EDGES AND A MINIMUM BLISTER RATING OF 8 WITHIN THE TEST SPECIMEN FIELD IN ACCORDANCE WITH TABLE 1 AND 2 OF AAMA 2605	Humidity resistance: no formation of blisters salt spray resistance: a. Rating of 9 on scribed b. Rating of 10 on unscribed	ON GOING	PASSED
	ASTM 1400	COATING THICKNESS	≥25 µm	28.9 µm		PASSED
	ASTM D968 METHOD A	ABRASION RESISTANCE	>50mil	488.5 L/mils		PASSED
	ASTM D 3363	PENCIL HARDNESS	≥2H	>4H		
	AAMA 2605 (CLAUSE 7.4)	FILM ADHESION	NO LOSS OF ADHESION	NO PEELING OF FILM NOR BLISTERING ANYWHERE WAS OBSERVED		PASSED
FIRE TEST	AAMA 2605 (CLAUSE 7.5)	IMPACT RESISTANCE	NO REMOVAL OF FILM SUBSTRATE	NO REMOVAL OF FILM SUBSTRATE		PASSED
	ASTM E 84	STANDARD TEST METHOD FOR SURFACE BULDDING CHARACTERISTICS OF BUILDING MATERIALS	CLASS 1 OR A: FLAME SPREAD INDEX (FSI) 0-25, SMOKE DEVELOPED INDEX (SDI) 0-450	FSI (15) SDI (15)	FSI (15) SDI (15)	PASSED
	ASTM D 1920-16	STANDARD TEST METHOD FOR DETERMINING IGNITION TEMPERATURE OF PLASTICS	WITH PASS CRITERIA MCM/ACP SHALL HAVE SELF IGNITION TEMPERATURE OF NOT LESS THAN 343°C	SELF-IGNITION 842°F (450°C) FLASH IGNITION 842°F (450°C)	SELF-IGNITION 842°F (450°C) FLASH IGNITION 842°F (450°C)	PASSED
	NFPA 285	STANDARD FIRE TEST METHOD FOR EVALUATION OF FIRE PROPAGATION CHARACTERISTICS OF EXTERIOR NONLOAD BEARING WALL ASSEMBLIES CONTAINING COMBUSTIBLE COMPONENTS	FLAMES DID NOT REACH 10 FEET ABOVE THE WINDOW OPENING. FLAMES DID NOT REACH A LATERAL DISTANCE OF 3 FT FROM THE VERTICAL CENTERLINE THERE WAS NO VISIBLE FLAMING IN THE SECOND STORY TEST ROOM. Tc 11 and Tc 14 THROUGH Tc 17 DID NOT EXCEED THE 1000°F LIMIT Tc 18 and Tc 18 DID NOT EXCEED THE 1000°F LIMIT Tc 28 and Tc 31 THROUGH Tc 40 DID NOT EXCEED THE 1000°F LIMIT Tc 49 THROUGH Tc 54 DID NOT EXCEED 500°F LIMIT ABOVE THE AMBIENT TEMPERATURE.	PASSED		PASSED





Techno Bond
Technical Data Sheet
FR A2

**Thank you for being part of
Techno Bond Team**



Techno Bond Copyright 2022®



KSA, Riyadh 🏠
📞 +966 5000 143 00
info@techno-bond.com @
www.techno-bond.com 🌐



🏠 Egypt, Cairo
📞 +2011 000 57 000 📞
@ info@techno-bond.com
🌐 www.techno-bond.com

NEW



Techno Bond is the most widespread in the Arab and African world. And the largest factory for producing cladding panels in the Middle East and African. In addition to advanced production lines with a production capacity of 14.000.000 square meters annually, a product approved by all Governmental Authorities in the Kingdom of Saudi Arabia and other countries, and the most widespread in the Kingdom of Saudi Arabia .

The factory works around the clock to provide customers request in the fastest time . You are guaranteed for 20 years against manufacturing defects.

